

A Compact and Wide Beam Radiating Element for Electronically Steered Array Antenna

Raj Kumar*, Rajesh Roy and V.K. Singh

DRDO-Defence Electronics Applications Laboratory, Dehradun - 248 001, India

*E-mail: raj.kumar.deal@gov.in

ABSTRACT

This paper discusses the design, simulation, optimization, and development of a wide-beam, rugged radiating antenna element at L-band frequencies. The antenna has been designed in radial horn configuration. The antenna consists of an L-shaped radiating element with two flared metallic walls to obtain a wide beamwidth. The half-power beamwidth of the designed antenna is approximately 117° in the E-plane- and 320° in the H-plane, respectively. The measured VSWR of the antenna over the frequency band of 1040 MHz to 1240 MHz is 1.85:1. The measured gain of the designed antenna is 1.88 dBi at 1100 MHz. The designed antenna has a size reduction of $\sim 50\%$ compared to the conventional antenna. Owing to wide beamwidth, the designed radiating element can be used for the realization of the electronically steered antenna with $\pm 55^\circ$ beam steering with a scan loss of 3 dB.

Keywords: Wide beam; L-band; Radial horn configuration; L-probe; VSWR

1. INTRODUCTION

High-gain directional antennas are required for long-distance point-to-point communication systems. Realization of these antennas may be done either in a reflector-based configuration or array-based configuration. At lower frequencies, the realization of the antenna in a reflector-based configuration has several limitations in terms of size and volume. Array configuration can be used to mitigate the size and volume limitations of reflector-based configuration, but this also requires the mechanical positioning system which can be used to orient the beam in the desired direction. One of the solutions to avoid these limitations would be the use of an electronically steered antenna.

Due to the multifold advantages of electronically steered antenna (ESA), all mechanically steered antennas are being replaced by it. ESA not only removes the positioning system from the mechanically steered antenna but also makes the system to steer the radiated beam faster. Other advantages of an electronically steered antenna include low profile, low RCS, no periodic maintenance etc.

One of the important components of the electronically steered antenna is the radiating element. It plays a very vital role in deciding the performance of ESA. For wide-angle scanning, using electronically steered antennas, the beamwidth of the radiating element should be as large as possible as this will help in reducing the scan loss of the antenna at a maximum steered angle.

Conventional horn antennas are a very popular directional antenna, where the sides of waveguides are flared in the E and

H planes to obtain directional radiation patterns. It is a very rugged antenna. Nos. of literature have been published on horn antennas¹⁻⁷.

One of the limitations of the horn antenna is that the size of the horn antenna is governed by the size of the waveguide. It cannot be smaller than the waveguide, as it is the feeding guide. Further, horn antenna is a directive antenna having a narrow beamwidth ($\leq 70^\circ$). To mitigate this, we have designed a compact L-shaped monopole antenna fed by an SMA connector and the directional pattern of the antenna has been obtained by flaring it using the metallic wall. Using this technique, we achieved large beamwidth in the E and H planes but with lower gain. Several configurations/ methods have been reported by several authors⁸⁻¹² for the realization of compact antenna with wideband and wide beam performance. Multiple ways have been reported to increase the impedance bandwidth of helical antennas¹³⁻¹⁵. Impedance bandwidth of the order of 7 % has been achieved by Louvière & Sharaiha¹³, *et al.* at L-band frequency. Sainati¹⁴, *et al.* achieved 7.7 % bandwidth in quadrifilar antenna at S-band frequency with dual-band operation. A printed quadrifilar antenna with 6 % bandwidth has been realized by Lamensdorf & Smolinski¹⁵.

The meander line technique has been utilized by Ibambe¹⁶, *et al.* to reduce the size of the antenna with enhanced efficiency. A sectoral conformal circular patch antenna with a shorted wall has been realized by Rao¹⁷, *et al.* to minimize the overall size and increase the beamwidth of the antenna. The paper also discusses the study of the antenna's radiation performance degradation when mounted on an aerial platform. Joong Nam, *et al.* in their paper¹⁸, discusses the wide beam antenna for a 5G wireless communication system. Single-fed wide beam dual-band L-probe fed antenna has been discussed by Yuanquin

Chen¹⁹, *et al.* This configuration of the antenna is very complex and for a large phased array, realization of radiating elements becomes very complex and difficult. Zhiming Xiao²⁰, *et al.* details a wideband magneto-electric dipole antenna with wide beamwidth for MM wave applications. Again, the configuration of the antenna does not allow it to be used as a radiating element for the large electronically steered antenna. In all the above-mentioned literature, radiating elements have either small beamwidth or are complex to be realized for large arrays for ESA.

The present paper describes a novel compact, rugged and simple wide beam and wideband antenna that can be used as a radiating element for an L-band electronically steered antenna with wide beam scanning. The antenna possesses more than 18 % impedance bandwidth at L-band frequency, and it has a beamwidth of the order of 117° & 320° in the E- and H- planes respectively. This makes the designed radiating element, suitable for beam steering of more than 55° with a scan loss of 3 dB.

2. DESIGN CONSIDERATION, METHODOLOGY & SIMULATION

The requirement of broadband operation and wide beamwidth for radiating elements can be met through many antenna configurations such as cross dipole, microstrip patch, helix and quadrifilar helix antenna etc. Cross dipole requires a large volume at the L-band. Microstrip patch antenna are low profile but require a larger size. Further, microstrip antennas are inherently narrowband antenna and hence cannot be selected for wideband operation. Helical antenna and printed quadrifilar antenna provide circularly polarized radiation, but in this case, maintaining the axial ratio over the wide radiated beam is very difficult.

One of the methods to design a wideband antenna is in waveguide configuration. The conventional horn antenna is fed by a rectangular/ circular waveguide and it is flared in E and H plane. The beamwidth of a conventional waveguide is of the order of 70° with a gain of 5-6 dBi. When it is flared in E and H plane, the beamwidth of the antenna decreases further and gain increases. Hence, the objective of a wide beam radiation pattern (beamwidth > 100°) cannot be met through a conventional horn antenna.

To overcome this, a quarter wavelength L-shaped capacitively loaded monopole has been used in the present work for wideband operation. To obtain the required wide beamwidth, two metallic walls have been utilized. It also helps in shaping the radiated beam. This configuration of antenna has been termed as radial horn antenna. In this configuration, an L-shaped metallic radiating element has been integrated with the input SMA connector. The gap between the input connector and the radiating element has been optimized to obtain the required antenna performance. The other end of the radiating element has been isolated from the flared wall using Teflon material. The antenna has been made compact by using L-shaped radiating geometry as well as capacitive loading. A curved dielectric radome has been designed, which protects the designed antenna from the outer environment.

Size of conventional monopole antenna: $\frac{\text{wavelength}}{4}$ (1)

At 1 GHz the wavelength is 300 mm and the size of the conventional antenna would be 75 mm. By using capacitive loading, the size of the antenna (L-shaped radiating element) has been reduced to 40 mm. In this way, we obtain a size reduction of about 50 % using this design.

All the dimensions of the radial horn antenna have been calculated theoretically and the antenna was modelled on High Frequency Structure Simulator (HFSS) software. After EM simulation, optimization of the antenna has been carried out to meet the coverage and gain requirement. Performance optimization of the antenna has been carried out at 1.1 GHz. The 3D CAD model of the designed antenna is shown in Fig. 1. Figure 2-3 shows the simulated VSWR and simulated

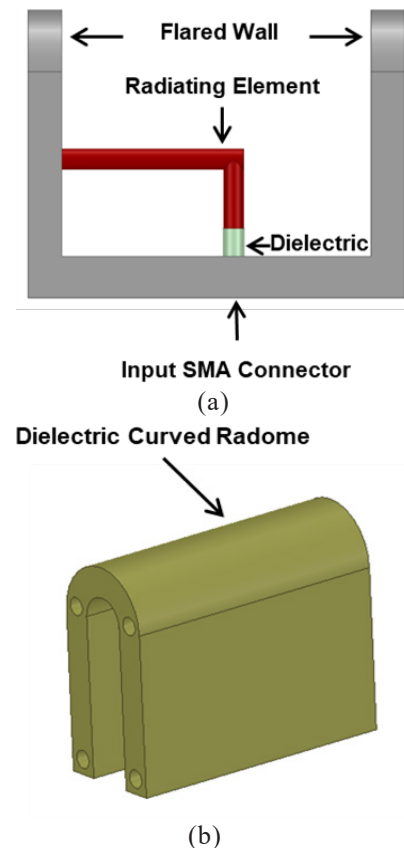


Figure 1. (a) 3D CAD model of the antenna element; and (b) 3D CAD model of radome.

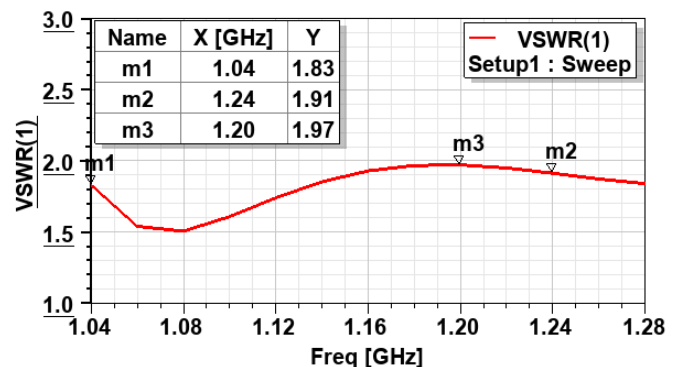


Figure 2. Simulated VSWR of the designed antenna.

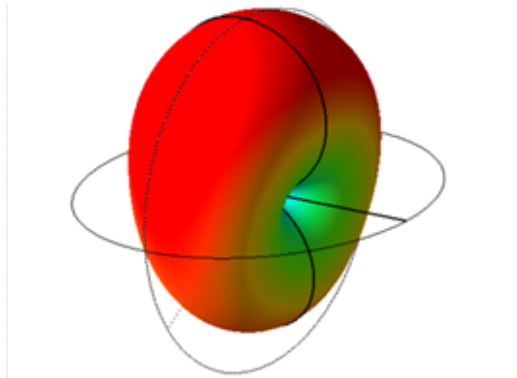


Figure 3. The simulated 3D radiation pattern of the designed antenna.

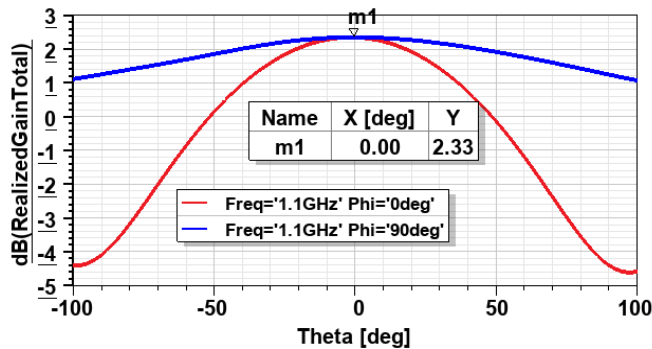


Figure 4. The Simulated 2D radiation pattern of the designed antenna in the E and H plane @ 1.1 GHz

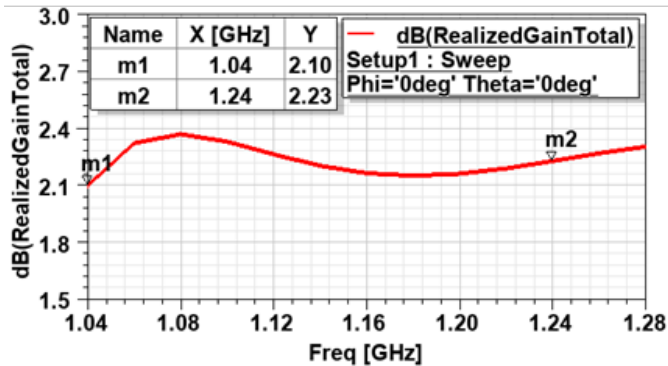


Figure 5. Gain variation of the antenna over the operating frequency band.

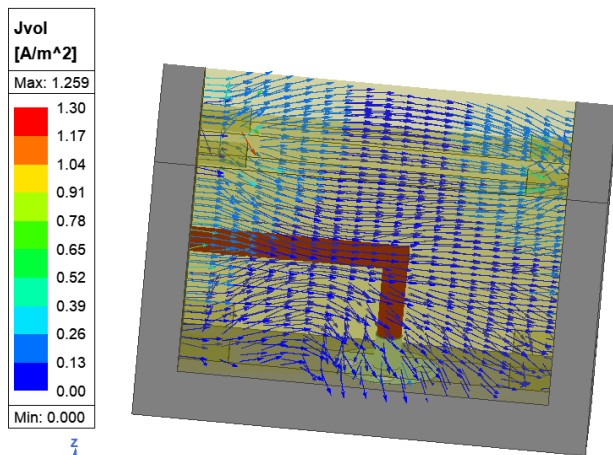


Figure 6. Current distribution of the radiating element as well as the radiation over the radiating area.

Table 1. Finalized dimensions of the designed radial horn antenna

Parameters	Dimensions
Vertical length of the radiating element (l_v)	0.07λ
Horizontal length of the radiating element (l_h)	0.11λ
The Diameter of the radiating element	0.01λ
Length of radial horn (l)	0.20λ
Width of radial horn (w)	0.06λ
Height of radial horn (h)	0.15λ
Dielectric material used	Teflon
Input connector	SMA (F)

Where λ is the wavelength at the frequency of operation.



Figure 7. The photograph of the developed antenna.


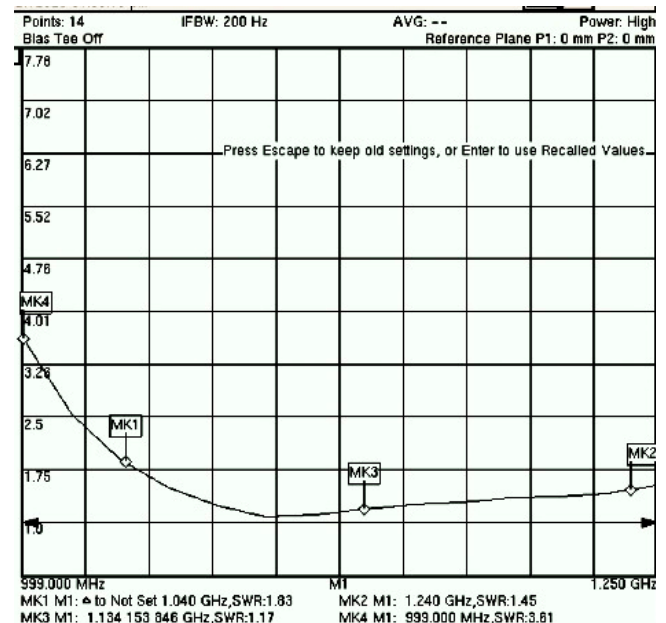


Figure 8. Measured VSWR of developed radial horn antenna.

3D-radiation pattern of the designed antenna. Simulated 2D-radiation patterns in the E and H plane @ 1.1 GHz and gain variation of the antenna over the operating frequency band are shown in Fig. 4 & Fig. 5 respectively. From the simulation results, it is seen that simulated VSWR over 1040 to 1240 MHz

FileName: RH.0007
 Frequency: 1.100000GHz
 Remarks: ANTENNA SNO : 01

Date: 04-05-23 17:06:57
 Plane: E-Plane
 Polarization: Horizontal

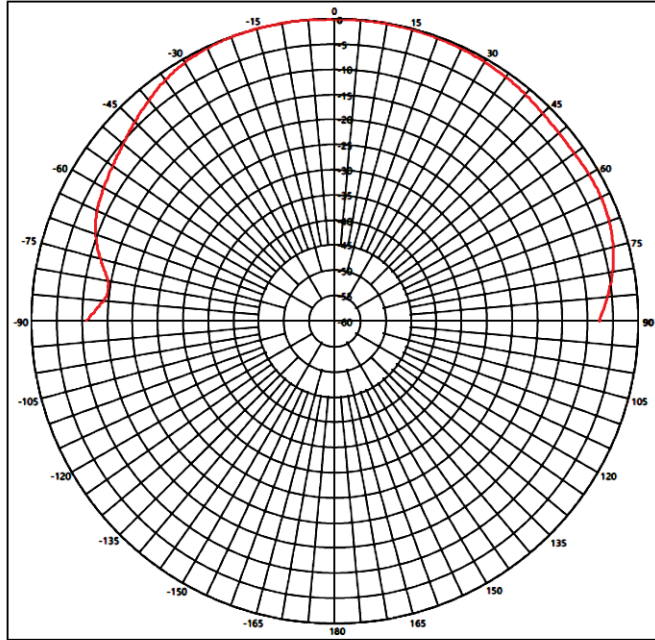


(a)

BW = 116.82°

FileName: RH.0010
 Frequency: 1.100000GHz
 Remarks: ANTENNA SNO : 01

Date: 04-05-23 17:18:27
 Plane: H-Plane
 Polarization: Vertical

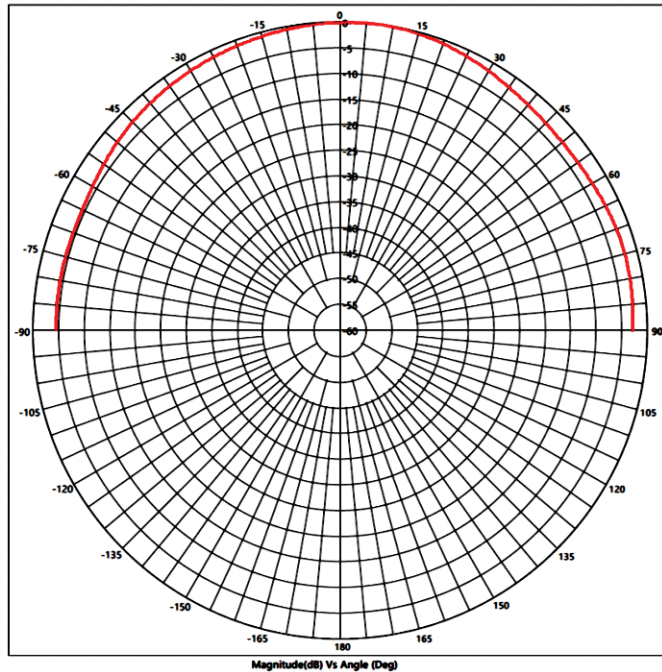

(b)

BW = 328.5°

Figure 9. Measured E- & H-plane radiation pattern of developed radial horn antenna.

is less than 2. The Simulated beamwidth of the antenna in E- and H-plane are 120° and 320°, respectively. The simulated gain of the antenna @ 1.1 GHz is 2.33 dBi. The current distribution of the radiating element as well as the radiation over the radiating area is shown in Fig. 6. Table 1 shows the finalized dimensions

of the designed antenna in terms of wavelength.

After rigorous optimization of the antenna, the antenna was fabricated in the Centre for Advanced Mechanical Engineering (CAME) facility of DEAL using the CNC machine with a fabrication tolerance of ± 50 micron. The radiating element (circular cylinder) was fabricated in two parts and later it was joined in an L-shape. The outer wall and base of the antenna were developed in an integrated manner and the radome for the antenna was developed using Teflon material. All the parts of the antenna were integrated and a SMA connector was integrated with the radiating element to feed the antenna. The photograph of the developed antenna is shown in Fig. 7.

3. EXPERIMENTAL RESULTS

VSWR measurement of the developed antenna was carried out using the vector network analyser. Figure 8 depicts the measured VSWR of the antenna. The measured VSWR of the antenna is in excellent agreement with the simulated values. 1.85:1 VSWR has been achieved over 1.04 GHz to 1.28 GHz. The realized antenna was evaluated for its radiation pattern in the Antenna Test Range Facility. The antenna was mounted in an anechoic chamber in such a manner that its polarization matches with that of the transmitting antenna. Figure 9 shows the measured radiation pattern of the developed antenna. The measured beamwidth of the antenna over the E- and H-plane are 117° & 320°, respectively. The Standard Gain Horn (SGH) method has been used to measure the gain of the realized antenna. The gain measurement of the antenna is shown in

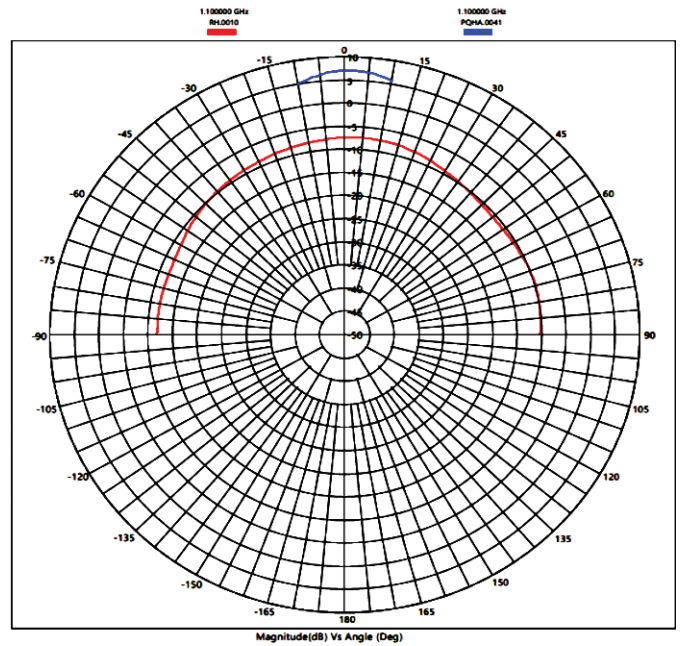


Figure 10. Gain measurement of developed radial horn antenna.

Fig. 10. The measured gain of the antenna is 1.88 dBi.

5. CONCLUSION

A wide beam compact, rugged and wideband radial horn antenna has been designed, simulated and developed using an L-shaped capacitively loaded monopole with flared wall. The developed Antenna shows measured impedance bandwidth of 18 % (1040MHz –1240MHz). The peak gain of the developed

antenna is 1.88 dBi at 1.1 GHz. The measured radiation pattern of the antenna shows E- and H- plane beamwidth of 117° & 320° which makes it a suitable radiating element for an Electronically Steered Antenna for $\pm 55^\circ$ beam steering with a scan loss of 3 dB. There is approximately a 50 % size reduction at the L-band using the above configuration of the antenna. Deviation in the gain of the antenna may be attributed to fabrication tolerances and measurement inaccuracies of antenna test range instruments. The realized antenna is the most suitable radiating element for a wide scan electronically steered antenna.

REFERENCES

1. Teniente J, Gonzalo R, del Rio C. Satellite horn antennas design. In 2009 EuCAP 2009, Mar 23 (pp. 3081-3084). IEEE
2. Bhattacharyya AK, Rollins GZ. Accurate radiation and impedance characteristics of horn antennas-a moment-method model. IEEE Transactions on Antennas and Propagation. 1996 Apr;44(4):523-31. doi: 10.1109/8.489304
3. Teniente J, Martinez A, Larumbe B, Ibanez A, Gonzalo R. Design guidelines of horn antennas that combine horizontal and vertical corrugations for satellite communications. IEEE Transactions on Antennas and Propagation. 2015 Apr 1;63(4):1314-23. doi:10.1109/TAP.2015.2390630
4. Pan W, Huang C, Chen P, Pu M, Ma X, Luo X. A beam steering horn antenna using active frequency selective surface. 2013 Dec 1;61(12):6218-23. doi:10.1109/TAP.2013.2280592
5. Abbas-Azimi M, Mazlumi F, Behnia F. Design of broadband constant-beamwidth conical corrugated-horn antennas antenna designer's notebook. IEEE Antennas and Propagation Magazine. 2009 Oct;51(5):109-14. doi:10.1109/MAP.2009.5432055
6. Bressner TA, Johansson MN, Smolders AB, Johannsen U. High-gain lens-horn antennas for energy-efficient 5G millimeter-wave communication infrastructure. IEEE Transactions on Antennas and Propagation. 2022 May 28;70(5):3183-94.
7. Balegh H, Arand BA, Yousefi L. Side lobe level reduction in horn antennas using graphene. In 2016 24th IEEE Iranian Conference on Electrical Engineering (ICEE) 2016 May 10: 1937-1941. doi: 10.1109/IranianCEE.2016.7585838
8. Amin M, Cahill R. Bandwidth limitation of two-port fed and self-phased quadrifilar helix antennas. Microwave and Optical Technology Letters. 2005 May 18;46(1):11-5. doi: 10.1002/mop.20886
9. A. Sharaiha, C. Terret. Overlapping quadrifilar resonant helix antenna. Electronics Letters. 1990 Jul 5;26(14):1090-2. doi: 10.1049/el:19900706
10. Hong W, Jiang ZH, Yu C, Zhou J, Chen P, Yu Z. Multibeam antenna technologies for 5G wireless communications. IEEE Transactions on Antennas and Propagation [Internet]. 2017 Dec 1;65(12):6231-49. doi: 10.1109/TAP.2017.2712819
11. Yang H, Cao X, Gao J, Yang H, Li T. A wide-beam antenna for wide-angle scanning linear phased arrays. IEEE Antennas and Wireless Propagation Letters. 2020 Sep 18;19(12):2122-6.
12. Luk KM, Wong H. A new wideband unidirectional antenna element. Int. J. Microw. Opt. Technol.; 2006 Jun 1;1(1):35-44.
13. Louvigné JC, Sharaiha A. Broadband tapered printed quadrifilar helical antenna. Electronics Letters. 2001 Jul 19;37(15):932-3. doi:10.1049/el:20010638
14. R. Sainati, J. Groppeoli, Olesen R, A. Stanland. A band-switched resonant quadrifilar helix. IEEE Transactions on Antennas and Propagation. 1982 Sep 1;30(5):1010-3. doi: 10.1109/TAP.1982.1142892
15. D. Lamensdorf, Smolinski MA. Dual band quadrifilar helix antenna, IEEE Antennas Propag. Symp., 2002,3,488-491. doi: 10.1109/APS.2002.1018258
16. M.G. Ibambe, Y. Letestu, A. Sharaiha. Compact printed quadrifilar helical antenna. Electronics Letters. Jun 21 20;43(13):697-8. doi: 10.1049/el:20070571
17. Varanasi SR, DR Jahagirdar, Kumar G. Design and Development of Compact Conformal Microstrip Antenna at S-Band. Defence Science Journal. 2018 Sep 12;68(5):519-22. doi: 10.14429/dsj.68.11944
18. Nam I, Lee S, Kim D. Advanced monopole antenna with a wide beamwidth for the assessment of outdoor 5G wireless communication environments. Microwave and Optical Technology Letters. 2018 Aug 11;60(9):2096-101. doi: 10.1002/mop.31313
19. Chen Y, Wang M, Yi Z, Zhang R, Yang G. A Wide-beamwidth Dual-band L-probe Fed Antenna with Parasitic Posts for 5G Communication. 2019 International Applied Computational Electromagnetics Society Symposium - China (ACES). 2019 Aug 1;1-2. doi: 10.23919/ACES48530.2019.9060750
20. Xiao Z, Pan Y, Liu X, Leung KW. A wideband magnetoelectric dipole antenna with wide beamwidth for millimeter-wave applications. IEEE Antennas and Wireless Propagation Letters. 2022 Dec 12;22(4):918-22. doi: 10.1109/LAWP.2022.3228289

CONTRIBUTORS

Dr Raj Kumar obtained his PhD degree in Electronically Steered Antenna from IIT Roorkee and working at DRDO-DEAL, Dehradun. His areas of interest include: Microwave and mm-wave antenna designs including omnidirectional antenna, fan beam antenna, slotted array antenna, antenna for radiometry, microstrip antennas, design of waveguide filters, reflector antennas, horn antennas, conformal antennas, phased array antenna, shared aperture antenna etc. In the current study he contributed to the design, simulation, development and measurement of the antenna.

Dr Rajesh Roy obtained his Ph.D. degree from the Jai Narain Vyas University, Jodhpur (Rajasthan) and working at DRDO-

DEAL, Dehradun. His areas of interest include: Microwave and mm wave antenna design and microwave integrated circuits. In the current study he contributed to the design, simulation, development and measurement of the antenna.

Mr V.K. Singh obtained his MTech Degree in Communication and Radar Engineering from the IIT, Delhi and working at DRDO-DEAL, Dehradun. His areas of research include: Design and development of RF and Microwave antennas for tactical communication requirements for Indian defence services. In the current study he contributed to the design review of the antenna.