

Reduction of Large Seismic Deformations using Elasto-plastic Passive Energy Dissipaters

K. Sathish Kumar, K. Muthumani, N. Gopalakrishnan and B. Sivarama Sarma

Structural Engineering Research Centre, Chennai – 600 113

and

G.R. Reddy and Y.M. Parulekar

Bhabha Atomic Research Centre, Mumbai – 400 085

ABSTRACT

The design of supporting systems for pipelines carrying highly toxic or radioactive liquids at very high temperature, is an important issue in the safety aspect for a nuclear power installation. These pipeline systems are normally designed to be held rigid by conventional snubber supports for protection from earthquake. The pipeline system design must balance the seismic deformations and other deformations due to thermal effect. A rigid pipeline system using conventional snubber supports always leads to an increase in thermal stresses, hence a rational seismic design for pipeline supporting systems becomes essential. Contrary to this rigid design, it is possible to design a flexible pipeline system and to decrease the seismic response by increasing the damping using passive energy absorbing (PEA) element, which dissipates vibration energy. An X-shaped or a hourglass-shaped metal element is a classic example of elasto-plastic passive energy absorber of metallic yielding-type. The inherent ductile property of metals like steel, which undergoes stable energy dissipation in the plastic region, is made use of in achieving energy loss. This paper presents the experimental and analytical studies carried out on yielding-type elasto-plastic PEA elements to be used in a passive energy dissipating device for the control of large seismic deformations of pipelines subjected to earthquake loading.

Keywords: Passive energy dissipation, passive energy absorber, X-plate device, metallic yielding devices, large seismic deformations, seismic response control

NOMENCLATURE

		F_y	Yield force of PEA element
a	Height of triangular portion of PEA element	H	Hardening rate of PEA element
		h	Hysteric energy dissipation ratio
b	Breadth of triangular portion of PEA element	K	Equivalent stiffness of PEA element
d	Displacement of PEA element	n	Number of PEA element
d_y	Yield displacement of PEA element	r	Ramberg-Osgood exponent
E	Elastic modulus of PEA element	t	Thickness of PEA element

y_0	Elastic depth
α	Jennings constant
ΔE	Energy dissipated per cycle by PEA element
σ_y	Yield strength of PEA element

1. INTRODUCTION

Presently, seismic design of pipeline systems in a nuclear plant is conducted under the rigid design philosophy, where large size rigid supports like snubbers are used as seismic supports. In the seismic support design, it is necessary to consider the thermal load in addition to the seismic load and the snubbers are used as devices to resist seismic load and allow thermal movement in piping. As these devices are relatively expensive and involve complex mechanisms, more inexpensive and reliable devices are desirable as alternative to snubbers. Recently, many studies¹⁻³ have been performed to find more reliable and economical support concepts, with various kinds of high damping supports of elasto-plastic, visco-elastic, friction, and lead extrusion types, aiming to reduce seismic response.

To evaluate an alternative seismic support for pipeline systems, a study⁴⁻⁶ has been performed on yielding-type elasto-plastic passive energy absorbing (PEA) elements/devices applied to pipeline systems. An X-shaped metal PEA is one considered for the study, because it greatly increases the system damping and there is no fatigue problem in the damper structure. In this paper, an experimental study on X-shaped metal PEA elements having different plate thickness, subjected to tests of static, dynamic, fatigue, and seismic types is presented. The test results were correlated with the theoretical results obtained from a standard Ramberg-Osgood (R-O) model using the experimentally evaluated auxiliary parameters. The validity of the R-O model in predicting the force-displacement hysteretic characteristics of X-shaped metal PEA elements is studied.

2. TESTING METHODOLOGY

2.1 Passive Energy Absorbing Elements/Device

PEA elements made of mild steel having three different thickness values of 3 mm, 4 mm and

6 mm were employed in the present study. Figure 1 shows the construction details of the yielding-type elasto-plastic PEA device and the individual PEA element used inside. The PEA element is basically made of mild steel plate having an X-shape. The energy dissipation is achieved by deforming the X-plate to plastic region. The force-displacement curve shows nonlinear hysteretic characteristics and the seismic response of the pipeline system is greatly reduced by the energy dissipation of the hysteresis loop. Since mild steel is used in the plastic region, this region must prevent plastic hinges from developing. Hence, a strong uniformly thick X-shaped plate is

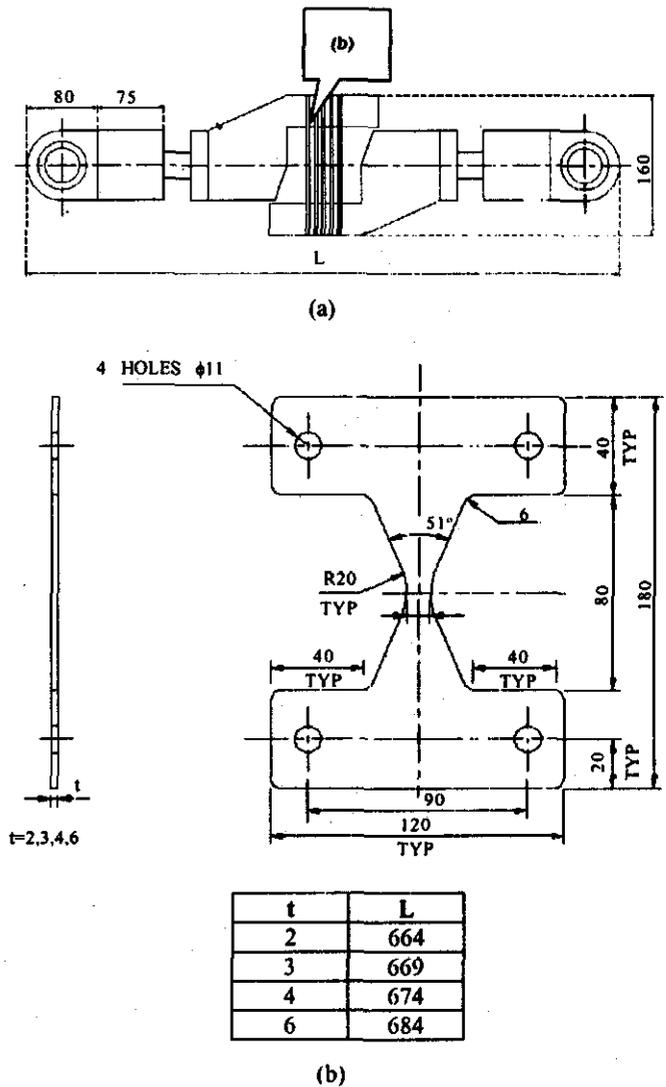


Figure 1. Yielding-type (a) elasto-plastic PEA device and (b) X-plate PEA element. (All dimensions in mm).

used as a plate spring. When this X-shaped plate has large deformation, the plastic domain progresses in the thickness direction of the plate, leading to simultaneous yielding over the triangular region. In the present study, the height and base of the triangle portion in an individual X-shaped plate were kept as 40 mm and 40 mm, respectively. The overall height and width of the single element were kept as 160 mm and 160 mm, respectively. The properties like yield stress, elastic modulus, and hardening rate for the element material were evaluated as 235 MPa, 1.94×10^5 MPa and 5.00×10^3 MPa, respectively.

2.2 Tests Conducted on Passive Energy Absorbing Element

The PEA elements were initially tested (using the facility created) using a displacement-controlled 50 kN actuator as shown in Fig. 2 under static conditions for evaluating the yield and post-yield behaviour. Then, using the same facility, dynamic, fatigue, and seismic loading tests were carried out on similar devices up to failure, for evaluating the performance in a seismic environment. For the dynamic and fatigue loadings, the rate of loading was kept as 3 Hz and with different increasing peak displacement amplitudes of say 5 mm, 10 mm,

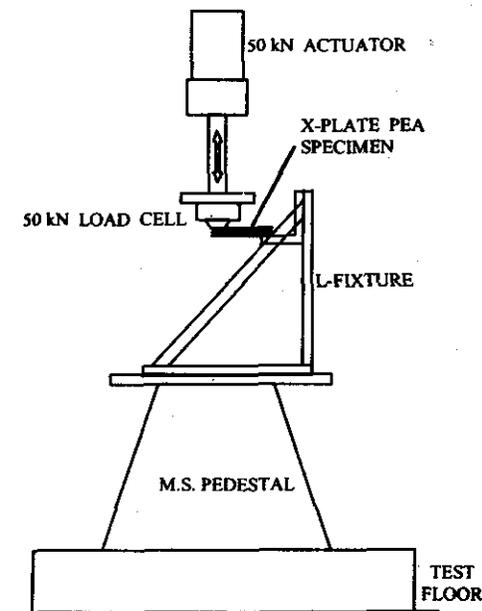


Figure 2. Test facility for evaluation of PEA elements

and 15 mm. From the force-displacement hysteretic loops, the dynamic stiffness and damping of the elements were evaluated. For the seismic loading tests, a spectrum-compatible displacement time history for a specific site was generated and applied to the elements in succession to evaluate their design life.

3. RESULTS

Figure 3 shows the dynamic/fatigue test results conducted on different PEA elements at constant peak-displacement amplitude of 15 mm at 3 Hz.

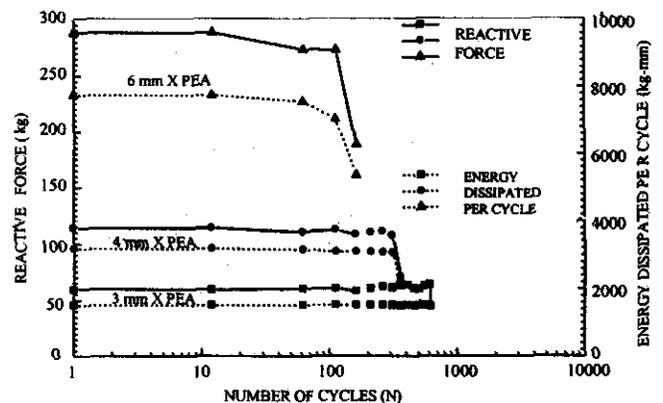


Figure 3. Dynamic test results on different PEA elements at constant peak displacement amplitude of 15 mm at 3 Hz.

From the reactive forces and force-displacement (hysteresis) curves obtained from the PEA elements, the design stiffness and damping of the individual PEA elements were evaluated.

Similarly, Fig. 4 shows the dynamic/fatigue test results conducted on 6 mm thick PEA elements at different peak-displacement amplitudes at the fixed loading rate of 3 Hz. Based on these results, the design life of different PEA elements were arrived at. A typical force-displacement response obtained on a 4 mm thick X-plate PEA elements under seismic loading is shown in Fig. 5.

4. ANALYTICAL STUDY

4.1 Static Loading

The material characteristics of the X-shaped plate [Fig. 6(a)], the elastic modulus, and the stress

used as a plate spring. When this X-shaped plate has large deformation, the plastic domain progresses in the thickness direction of the plate, leading to simultaneous yielding over the triangular region. In the present study, the height and base of the triangle portion in an individual X-shaped plate were kept as 40 mm and 40 mm, respectively. The overall height and width of the single element were kept as 160 mm and 160 mm, respectively. The properties like yield stress, elastic modulus, and hardening rate for the element material were evaluated as 235 MPa, 1.94×10^5 MPa and 5.00×10^3 MPa, respectively.

2.2 Tests Conducted on Passive Energy Absorbing Element

The PEA elements were initially tested (using the facility created) using a displacement-controlled 50 kN actuator as shown in Fig. 2 under static conditions for evaluating the yield and post-yield behaviour. Then, using the same facility, dynamic, fatigue, and seismic loading tests were carried out on similar devices up to failure, for evaluating the performance in a seismic environment. For the dynamic and fatigue loadings, the rate of loading was kept as 3 Hz and with different increasing peak displacement amplitudes of say 5 mm, 10 mm,

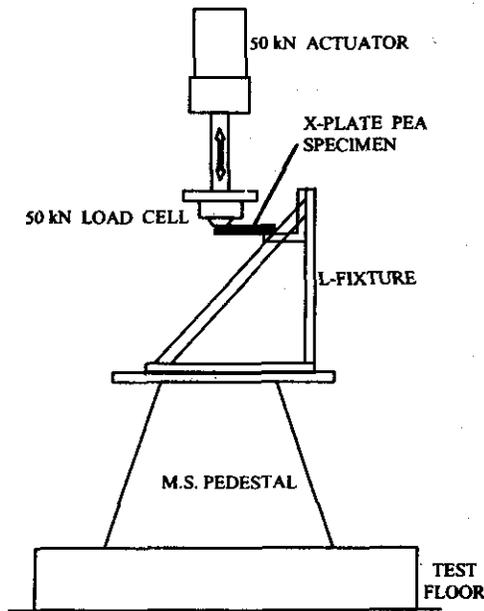


Figure 2. Test facility for evaluation of PEA elements

and 15 mm. From the force-displacement hysteretic loops, the dynamic stiffness and damping of the elements were evaluated. For the seismic loading tests, a spectrum-compatible displacement time history for a specific site was generated and applied to the elements in succession to evaluate their design life.

3. RESULTS

Figure 3 shows the dynamic/fatigue test results conducted on different PEA elements at constant peak-displacement amplitude of 15 mm at 3 Hz.

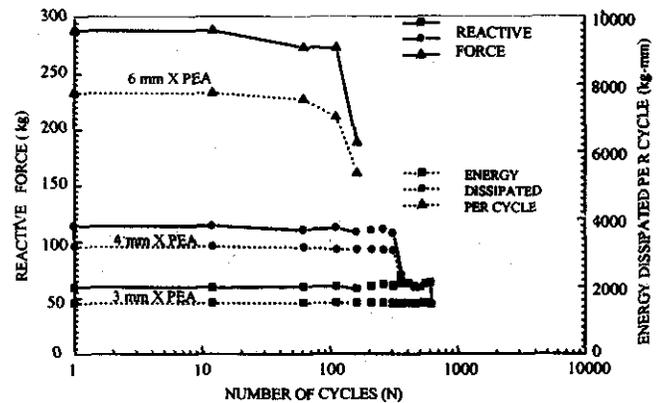


Figure 3. Dynamic test results on different PEA elements at constant peak displacement amplitude of 15 mm at 3 Hz.

From the reactive forces and force-displacement (hysteresis) curves obtained from the PEA elements, the design stiffness and damping of the individual PEA elements were evaluated.

Similarly, Fig. 4 shows the dynamic/fatigue test results conducted on 6 mm thick PEA elements at different peak-displacement amplitudes at the fixed loading rate of 3 Hz. Based on these results, the design life of different PEA elements were arrived at. A typical force-displacement response obtained on a 4 mm thick X-plate PEA elements under seismic loading is shown in Fig. 5.

4. ANALYTICAL STUDY

4.1 Static Loading

The material characteristics of the X-shaped plate [Fig. 6(a)], the elastic modulus, and the stress

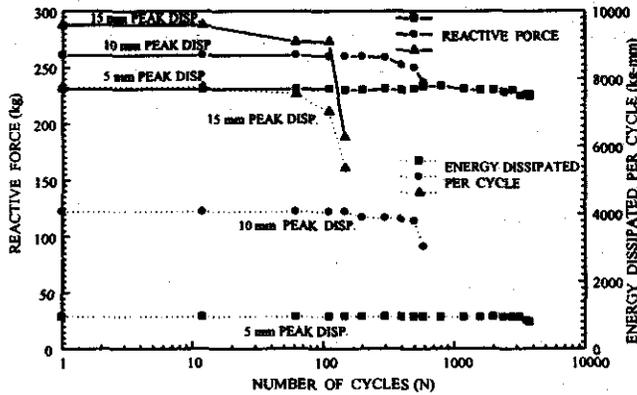


Figure 4. Dynamic test results on 6 mm thickness PEA elements at different displacement amplitudes at 3Hz.

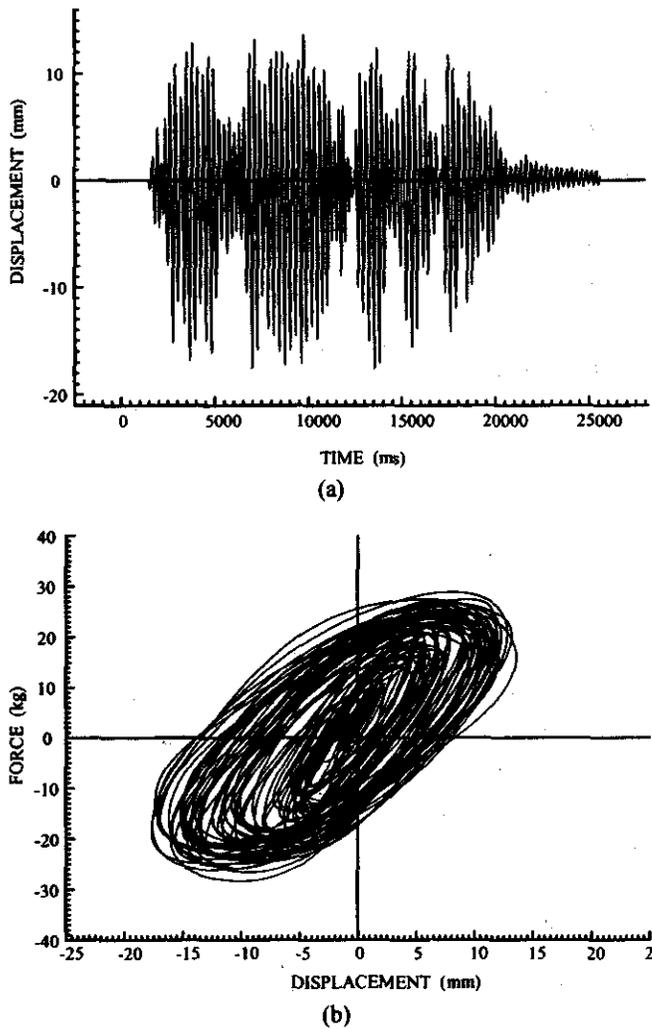


Figure 5. Typical seismic responses measured on a 4 mm thick X-plate PEA element under earthquake loading: (a) displacement-time history and (b) force-displacement curve.

hardening rate, are expressed by the bi-linear model. The skeleton curve of the force-displacement curve [Fig. 6(b)] of the X-shaped plate for each stress level was investigated by beam theory.

In the elastic domain, the relationship between the force (F) and the displacement (d) is given as

$$F = \frac{Ebt^3n}{12a^3}d$$

and the equivalent stiffness of the X-plate (K) is given as

$$K = \frac{Ebt^3n}{12a^3} \tag{1}$$

where, a is the height, b is the maximum breadth, t is the thickness, and n is the number of the PEA elements, respectively of the triangular X-plate.

In the plastic domain at the yield point, the X-shaped plate surface is plastic and the plate surface stress is σ_y . The yield force (F_y) and corresponding yield displacement (d_y) are given as

$$F_y = \frac{\sigma_y t^2 b}{6 a} n; \quad d_y = \frac{2\sigma_y a^2}{Et} \tag{2}$$


Similarly in the plastic region [Fig. 6(c)], considering the effect due to strain hardening rate, the force-displacement relation is given as

$$F = \frac{nb\sigma_y}{12Ea} \left\{ (4y_o^2 - 3t^2)(H - E) + H \frac{t^3}{y_o} \right\} \tag{3}$$


the elastic depth y_o can be evaluated using

$$y_o = \frac{\sigma_y a^2}{Ed} \tag{4}$$


The hysteresis loop can be obtained by giving the stress-strain characteristics of the very small part as bi-linear in each stress condition. The equivalent stiffness and the element damping ratio can show the dynamic characteristics of passive energy dissipation. The former is obtained from the

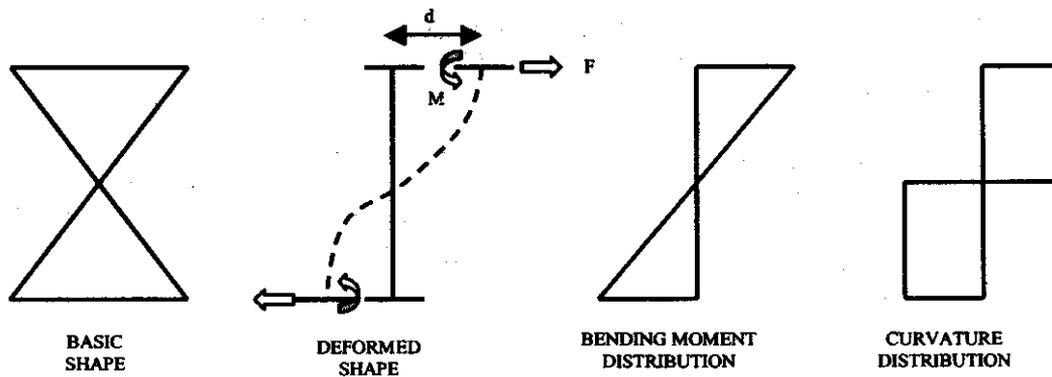

(a)

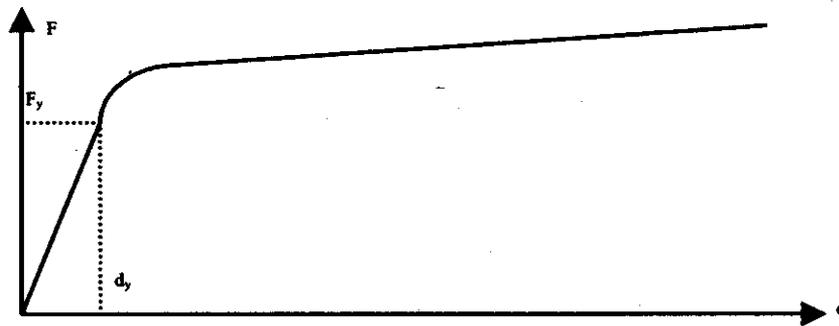

(b)

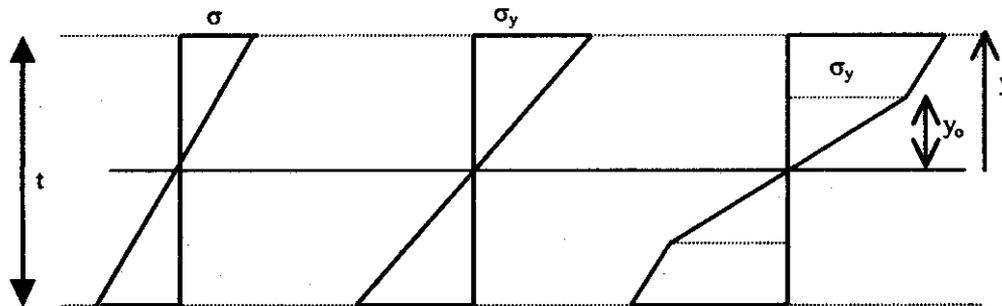

(c)

Figure 6. Analytical modelling of X-plate PEA element under static loading: (a) X-plate PEA element, (b) static force-displacement curve, and (c) variation of stress across thickness at various stages of loading.

tangential stiffness at the reversal point of the skeleton curve. The latter is obtained as the ratio between the element strain energy and the dissipating energy per cycle (ΔE).

$$\Delta E = 3F_y(d + d_1) + \frac{d_y^2 F_y}{(d + d_1)} - (3d_y F_y) - [F_y t^2 / K] \quad (5)$$

$$h = \frac{\Delta E}{2\pi K d^2} \quad (6)$$


4.2 Dynamic/Cyclic Loading

In the elasto-plastic analysis of these X-plate PEA elements under dynamic or cyclic loadings, standard hysteretic models^{1,4}, such as ideal elasto-plastic, bi-linear, Bauschinger, Ramberg-Osgood, Takeda, Wen and Polygonal model, etc. are usually used. The basic form of the force-displacement model is selected, which is usually based upon an analogy with plasticity theory, and then the model

parameters are determined via a curve-fitting procedure. Of all the hysteretic models stated, the Ramberg-Osgood model^{1,4} developed by Jennings suits closely to such X-shaped PEA elements. The Ramberg-Osgood model essentially establishes a power law relationship between the force and the inelastic displacement, and consequently is effective in modelling

constant, according to the shape of the actual hysteretic curve (Fig. 7).

In the present study, the values of these auxiliary parameters were realistically evaluated from the static test results using curve-fitting procedure. The force-displacement relations at various stages in the hysteresis loop were obtained using the following expressions.

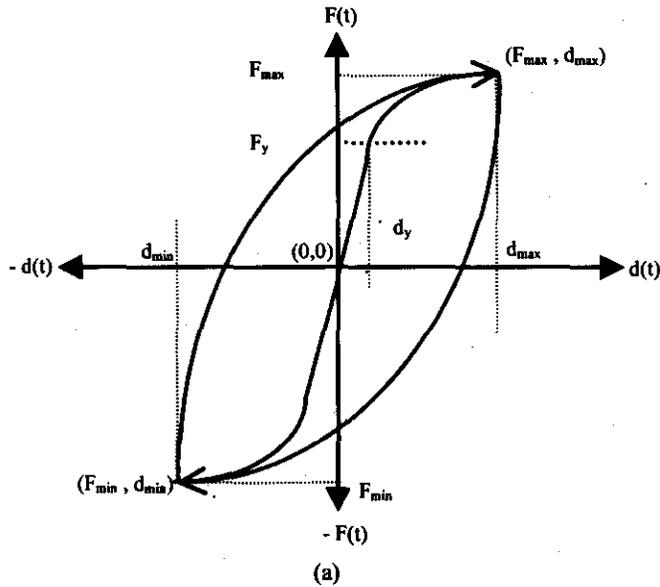

- For the basic loading branch of the hysteresis loop between the coordinates (0, 0) and (F_{max}, d_{max})

$$\frac{d(t)}{d_y} = \frac{F(t)}{F_y} \left(1 + \alpha \left(\text{abs} \frac{F(t)}{F_y} \right)^{r-1} \right) \quad (7)$$

- For the unloading branch of the hysteresis loop between the coordinates (F_{max}, d_{max}) and (F_{min}, d_{min})

$$\frac{d(t) - d_{max}}{d_y} = \frac{F(t) - F_{max}}{F_y} \times \left(1 + \alpha \left(\text{abs} \left(\frac{F(t) - F_{max}}{2F_y} \right) \right)^{r-1} \right) \quad (8)$$

- For the reloading branch of the hysteresis loop between the coordinates (F_{min}, d_{min}) and (F_{max}, d_{max})

$$\frac{d(t) - d_{min}}{d_y} = \frac{F(t) - F_{min}}{F_y} \times \left(1 + \alpha \left(\text{abs} \left(\frac{F(t) - F_{min}}{2F_y} \right) \right)^{r-1} \right) \quad (9)$$

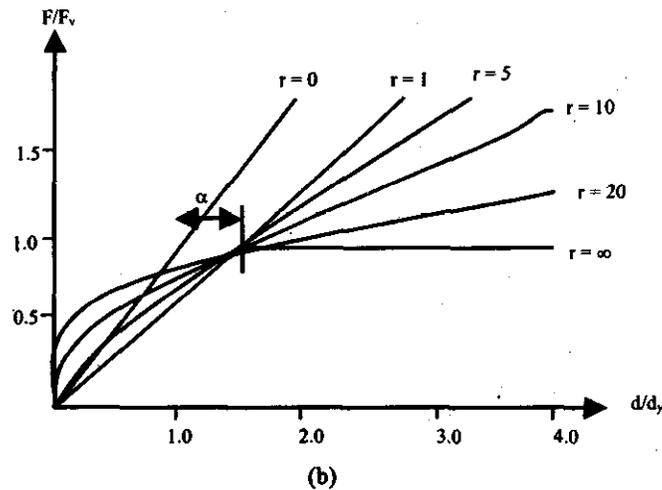


Figure 7. Ramberg-Osgood model employed for modelling X-plate PEA elements under dynamic loading: (a) hysteresis loop, and (b) Ramberg-Osgood function.

the response of a variety of metals under cyclic/dynamic loadings. This model approximates the shape of the force-displacement curve (F(t) – d(t)) by appropriate selection of the auxiliary parameters called Ramberg-Osgood exponent and Jennings

The hysteretic energy dissipation index (h) of the X-plate PEA element using the Ramberg-Osgood model is expressed as

$$h = \frac{2}{\pi} \left(1 - \frac{2\alpha}{r+1} \right) \left(1 - \frac{d_y F_{max}}{F_y d_{max}} \right) \quad (10)$$

Figure 8 shows the comparison between the theoretical and the experimental results under static loading on a 4 mm thick X-plate PEA elements.

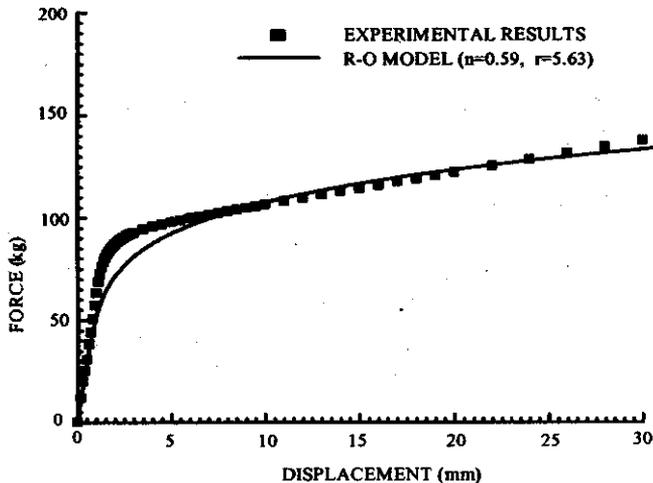


Figure 8. Comparison between theoretical and experimental results under static loading for a 4 mm thick X-plate PEA element.

Similarly, Fig. 9 shows the comparison between the theoretical and the experimental results on a 4 mm thick X-plate PEA elements under dynamic loading of sinusoidal nature at a loading rate of

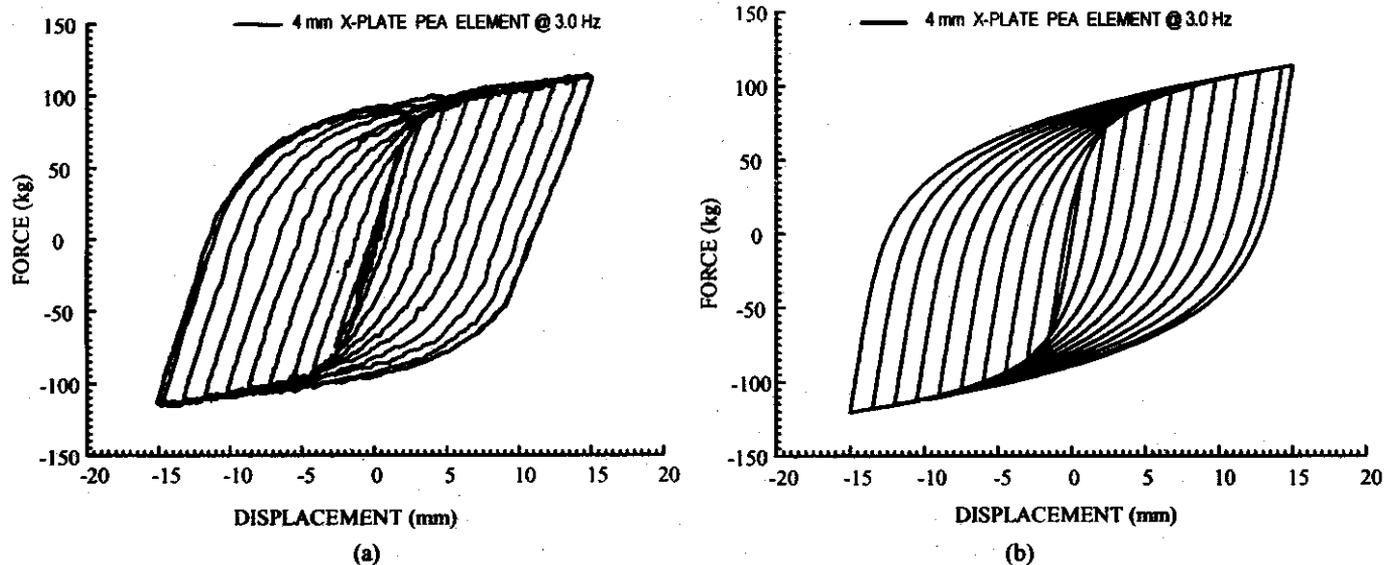


Figure 9. Comparison between theoretical and experimental results under dynamic loading at 3 Hz for a 4 mm thick X-plate PEA element: (a) Experimental curve and (b) theoretical curve.

3 Hz and 15 mm peak displacement amplitude, with an initial ramping-up enveloping function for the first ten cycles.

5. OBSERVATIONS & CONCLUSIONS

A close match is found between the analytical and the experimental responses of X-plate PEA elements both under static and dynamic loadings, thus proving the validity of Ramberg-Osgood model in predicting the design parameters required for designing PEA elements of yielding-type. The large and stable energy dissipation per cycle observed from the stable force-displacement hysteretic curves up to failure obtained from the dynamic/fatigue tests showed the suitability of X-plate PEA elements for designing a passive energy dissipating device for controlling the large seismic deformations of pipeline systems subjected to earthquake loading.


ACKNOWLEDGEMENTS

The authors wish to express their deep appreciation to the Director, Structural Engineering Research Centre, Chennai and Head, Reactor Safety Division, Bhabha Atomic Research Centre, Mumbai, for their valuable advice and kind permission to publish the combined research work.

REFERENCES

1. Namita, Y.; Shigeta, M.; Yoshinaga, T.; Gotoh, N. & Kawahata, J. The application of elasto-plastic support devices for piping System. *Proc. JSME Int. J.*, 1991, Series III, 34(1), 42-47.
2. Chiba, Y. & Kobayashi, H. Response characteristics of piping system supported by visco-elastic and elasto-plastic dampers. *In Transactions of the ASME on Pressure Vessel Technology*, 1992, 112. pp. 34-38.
3. Kokubo, E.; Fujita, K.; Fuyama, H. & Ichihashi, I. Development of a lead extrusion damper for PWR reactor coolant loops system. *In ASME Special Publication on Seismic Engineering*. 1995, PVP-312. pp. 425-31.
4. Sathish kumar, K.; Muthumani, K.; Sivarama Sarma, B. & Gopalakrishnan, N. Evaluation of X-type metal passive energy absorbers. Structural Engineering Research Centre, Chennai, 2000. Technical Report No. SSP 4741/1.
5. Gopalakrishnan, N.; Sathish kumar, K.; Muthumani, K. & Sivarama Sarma, B. Evaluation of seismic response of a pipe element with X-type metal passive energy absorbers. Structural Engineering Research Centre, Chennai, 2001. Technical Report No. SSP 4741/2.
6. Sivarama Sarma, B.; Sathish kumar, K.; Gopalakrishnan, N. & Muthumani, K. Evaluation of seismic response of a 3-D pipe system with X-type metal passive energy absorbers. Structural Engineering Research Centre, Chennai, 2001. Technical Report No. SSP 4741/3.

Contributors



Mr K Sathish Kumar obtained his MS (Civil Engg) from the PSG College of Technology, Coimbatore in 1989. Since 1989, he is working at the Structural Engineering Research Centre(SERC), Chennai in the Structural Dynamics Division and presently he is working as Assistant Director. His areas of specialisation include: Experimental dynamics with specific application to pile-soil interaction studies, machine foundations, vibration isolation, earthquake engineering, etc. Currently, he is working in the area of seismic response control of structures using passive energy dissipators. He has more than 30 research papers to his credit.



Dr K Muthumani obtained his masters degree and PhD from the Indian Institute of Technology (IIT) Madras, Chennai. Since 1980, he has been working in the SERC, Chennai. Presently, he is Head, Structural Dynamics Division of SERC. His areas of specialisation include: Machine foundations, earthquake engineering, experimental dynamics with specific application to pile-soil interaction studies, vibration control, etc. Presently, he is working in the area of seismic response control of structures using passive energy dissipators and base isolation. He has more than 50 research papers to his credit.